

# ED-27X

## LCD Projectors


### Specifications

Model name	ED-27X
Product name	Liquid crystal projector 3LCD
Liquid crystal panel	768,431 pixels (1024 x 768)
Lamp	215W UHP
Light output (brightness)	2700lm
Contrast ratio (Presentation mode)	2000:1
Speaker	No
Display resolution video	No
Power supply / Rated current	AC 100V-120V / 3.3A AC220-240V / 1.6A
Power consumption	320W
Temperature range	5~35°C
Dimensions (WxHxD)	320 x 85 x 245 mm
Weight (mass)	3.0 kg
Terminals	<ul style="list-style-type: none"> <li>Computer In: 15-pin Mini-D-sub x 2</li> <li>Computer Out: 15-pin Mini-D-sub Share with Comp 2 In</li> <li>Component video In: No</li> <li>Composite video In: No</li> <li>Control (RS232C): D-sub 9-pin connector x 1</li> <li>Audio In: No</li> </ul>
Other	<ul style="list-style-type: none"> <li>Lamp life: 6000 / 5000 hr</li> <li>Filter cleaning cycle: 5000 hr</li> <li>Altitude: up to 10,000 feet</li> </ul>
Operation parts	<ul style="list-style-type: none"> <li>Lamp: DT01431</li> </ul>

### Dimensions



### Projection Distance

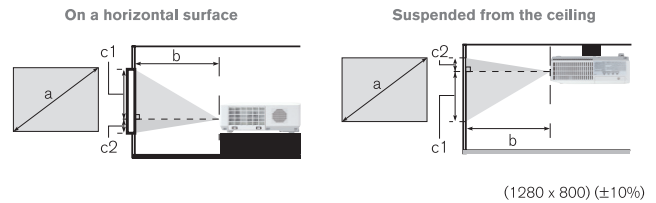

Screen size (diagonal)	16:10								4:3								
	Projection distance				c1 Screen height		c2 Screen height		Projection distance				c1 Screen height		c2 Screen height		
	type	min		max		cm		inch		min		max		cm		inch	
(inch)	m	m	inch	m	inch	cm	inch	cm	inch	m	inch	m	inch	cm	inch	cm	inch
30	0.8	0.9	36	1.1	44	38	15	3	1	1.0	41	1.3	50	42	17	3	1
40	1.0	1.2	49	1.5	59	50	20	4	2	1.4	56	1.7	67	57	22	4	2
50	1.3	1.6	62	1.9	74	63	25	5	2	1.8	70	2.1	84	71	28	5	2
60	1.5	1.9	74	2.3	89	75	30	6	2	2.1	84	2.6	101	85	33	7	3
70	1.8	2.2	87	2.7	105	88	34	7	3	2.5	99	3.0	119	99	39	8	3
80	2.0	2.5	99	3.0	120	100	39	8	3	2.9	113	3.4	136	113	45	9	3
90	2.3	2.8	112	3.4	135	113	44	9	3	3.2	127	3.9	153	127	50	10	4
100	2.5	3.2	125	3.8	150	125	49	10	4	3.6	142	4.3	170	142	56	11	4
120	3.0	3.8	150	4.6	181	150	59	12	5	4.3	170	5.2	205	170	67	13	5
150	3.8	4.8	188	5.7	226	188	74	14	6	5.4	213	6.5	256	212	84	16	6
200	5.1	6.4	251	7.7	302	250	98	19	8	7.2	285	8.7	342	283	111	22	9
250	6.4	8.0	315	9.6	378	313	123	24	9	9.1	357	10.9	428	354	139	27	11
300	7.6	9.6	378	11.5	454	375	148	29	11	10.9	428	13.1	514	425	167	33	13

### Terminals

## ED-27X

